
E-CLAM 28 - 38 & 50 / AUTO (*)



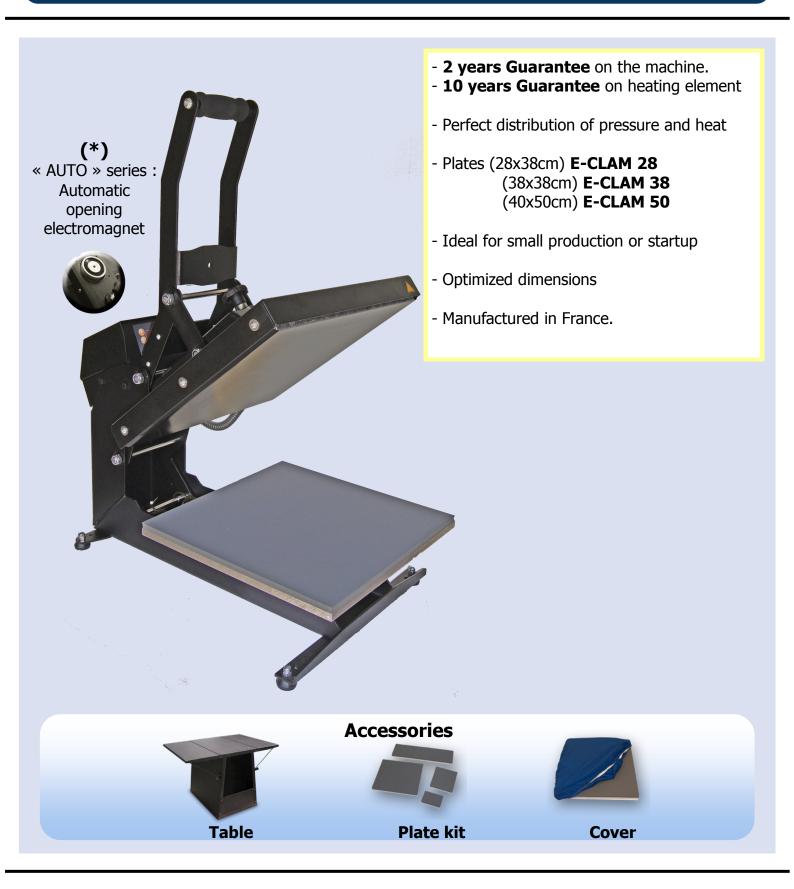

IMAS Grafica Srl

Via Brisconno 10, Abbiategrasso (MI)

+39 02.94.96.96.72 | servizioclienti@imasgrafica.com

Web-site: www.imasgrafica.com

Technical characteristics

Plates Sizes E-CLAM 28: 280 x 380 mm E-CLAM 38: 380 x 380 mm

E-CLAM 50: 400 x 500 mm

Weight E-CLAM 28: 34 kg

E-CLAM 38: 37 kg

E-CLAM 50: 40 kg

Pressure E-CLAM 28: 600 gr/cm²

> E-CLAM 38: 450 gr/cm² E-CLAM 50: 300 gr/cm²

Max Temperature 220°C

Power Supply 230 V

Electric Power E-CLAM 28: 1500W

> E-CLAM 38: 2000W E-CLAM 50: 2500W

Amperage 11 A

Settings



Control panel



« MANUAL » Series

« AUTO » Series

Electronics developped by Sefa.

Accurate and fast regulation (PID control) for a wide range of heat transfer products: Flex, lock, sublimation, screen printing transfer.



Easy interface:

Temperature and pressing time

From 0 to 570 sec (precision +/-1%). From 0 to 220°C (précision +/- 1%).

Temperature rising time from 0 to 180°C: 15 mn. « Stop cycle » available on « AUTO » Series

Accessories




Table TAB-PRO2 -EXT:

Strong support table, perfect for Sefa presses


With retractable extensions on


each side





Set of 4 plates, Useful for precise work. 120x80 mm - 150x150 mm 120x450 mm - 250x300 mm





Softer and gliding surface to easily put your textile on the plate.

Protecting the foam as well.

Dimensions

